

TURBO MINI SCOUTLIGHT PRO

COMPACT DUAL FUEL HIGH-CANDELA WEAPONLIGHT



550* LUMENS



71,000* CANDELA



2* HOURS



533* METERS



REFLECTOR



DUAL FUEL



RECHARGEABLE



IPX7

DESCRIPTION

SureFire's Scout Light Pro series rewrote the rules of WeaponLight versatility. The M340DFT combines high-candela performance and dual-fuel capability. The M340DFT delivers the farthest-reaching beam of any SureFire long gun WeaponLight in a compact form factor. As a result, it is ideal for long-range target identification.

The M340DFT projects a peak beam intensity of 71,000 candela, using the included SF18350 rechargeable lithium-ion battery, or 33,000 candela with a single 123A primary battery. It offers tremendous versatility by also providing ample spill light for situational awareness without sacrificing long-range performance.

The Scout Light Pro Low-Profile Mount (LPM) delivers unprecedented versatility, allowing the user to optimize the light's position relative to the rail and other attached firearm accessories. Rugged and reliable, the LPM easily and securely attaches to any MIL-STD-1913 or M-LOK rail.

Constructed of lightweight aerospace aluminum, Mil-Spec hard-anodized, and O-ring sealed to keep out the elements, the M340DFT Scout Light Pro is the best-performing, most feature-rich, WeaponLight for its size.

FEATURES

- Precision reflector produces a high-candela, far-reaching beam ideal for target identification at long distances
- Generates 71,000 candela and 550 lumens of focused light with SF18350 or 33,000 candela and 300 lumens with one 123A battery
- Versatile Low-Profile Mount (LPM) allows the user to optimize the light's position relative to the rail and other attached firearm accessories
- Mil-Spec hard-anodized aluminum body and tempered window make it light rugged, durable and combat ready
- Activation via ZE68 momentary/constant-on pushbutton switching with protective shroud
- Compatible with a host of remote tape switches
- Meets IPX7 waterproof test standard at 1 meter for 30 minutes
- Note: SF18350 battery required for 550 lumen output, 71,000 candela, 45 minutes runtime, and 533 meter beam distance



| SPECIFICATIONS | M340DFT | |
|----------------|----------------------|--|
| | COLOR | |
| | OUTPUT* | 18350: 550 123A: 300 lumens |
| | RUNTIME* | 18350: 45min 123A: 1 hours |
| | PEAK BEAM INTENSITY* | 18350: 71,000 123A: 33,000 candela |
| | DISTANCE* | 18350: 533 123A: 363 meters |
| | CONSTRUCTION | Aluminum |
| | FINISH | Hard Anodized (MIL-A-8625 Type III, Class 2) |
| | WEIGHT (w/batteries) | 5.11 oz (144.9 g) |
| | LENGTH | 4.8 in (12.2 cm) |
| | BEZEL DIAMETER | 1.258 in (3.2 cm) |
| | BATTERIES | One SF18350 (incl) or One 123A |
| | SWITCHING | Click tailcap |

All performance claims tested to ANSI/NEMA FL1-2019 Standard.

*SF18350 battery required for 550 lumen output, 71,000 candela, 45 minutes runtime, and 533 meter beam distance

PART# / UPC

| | |
|----------------|--------------|
| M340DFT-BK-PRO | 084871331555 |
| M340DFT-TN-PRO | 084871331562 |




THE WORLD'S FINEST ILLUMINATION TOOLS, SUPPRESSORS, & TACTICAL PRODUCTS*

18300 Mt. Baldy Circle, Fountain Valley, CA 92708 | 714-545-9444 | Fax: 714-545-9537 | surefire.com

Actual product may vary from photo. Prices and specifications subject to change without notice. | Export of the product(s) shown herein must comply with the appropriate U.S. Government Jurisdiction(s) and Regulation(s).

©2022 SureFire, LLC JAN

PACKAGING SPECS



| | |
|--------|-------------------|
| TYPE | Box - Kraft Stock |
| HEIGHT | 8 in (20.3 cm) |
| WIDTH | 4.75 in (12.1 cm) |
| DEPTH | 1.75 in (4.4 cm) |

FEATURED ACCESSORIES



123A LITHIUM BATTERIES


Available in 2, 6, 12-packs and bulk options



SC1 SPARE BATTERY CARRIER

Other appropriate models also available

BODY SPECS

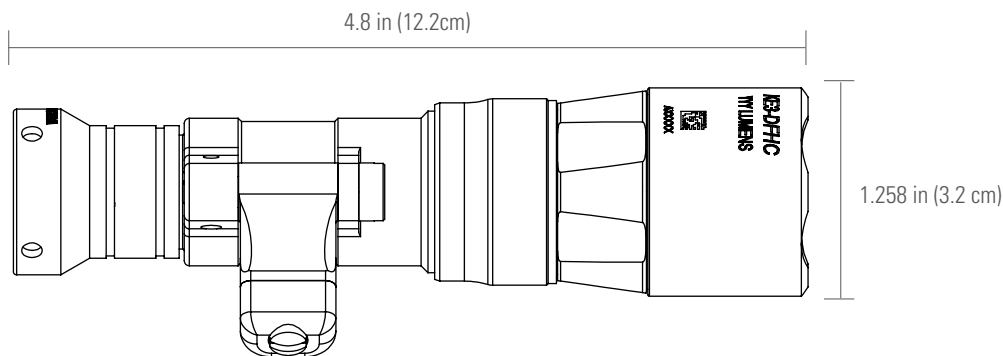

BATTERY SPECS

| SF18350B | RATING/PERFORMANCE |
|---|-----------------------------------|
| TYPE | 18350 w/micro USB Charger and PCM |
| VOLTAGE | 3.7V |
| CERTIFICATION | UN38.3 |
| CHARGE END VOLTAGE | 4.2V |
| CHEMISTRY | Lithium-Ion |
| DIMENSIONS | 39.8±0.3 mm x 18.6±0.3 mm |
| DISCHARGE END VOLTAGE | 2.5V |
| DISCHARGE RATE | 10A |
| ENERGY | 4.07Wh |
| LITHIUM CONTENT | 0.33 g |
| OPERATING TEMP RANGE [CHARGING] | 0-45°C |
| OPERATING TEMP RANGE [DISCHARGING 0.2C] | -10-65°C |
| OPERATING TEMP RANGE [DISCHARGING 1C] | -10-65°C |
| RATED CAPACITY | 1.1Ah |
| STANDARD CHARGE RATE | 500mA (USB), External 1A/1C |
| CHARGE TIME FROM EMPTY [USB] | 3 hours |
| STORAGE TEMP RANGE | 23±5°C Recommended |
| WEIGHT | 27 g |

18350 Battery Charger Specification Requirements:

1. Use only a smart charger that uses a constant current/constant voltage charge cycle
2. Output of 4.2VDC, with charge current output of 0.5 to 2A



MIL-STD



THE WORLD'S FINEST ILLUMINATION TOOLS, SUPPRESSORS, & TACTICAL PRODUCTS®

18300 Mt. Baldy Circle, Fountain Valley, CA 92708 | 714-545-9444 | Fax: 714-545-9537 | surefire.com

Actual product may vary from photo. Prices and specifications subject to change without notice. | Export of the product(s) shown herein must comply with the appropriate U.S. Government Jurisdiction(s) and Regulation(s).