LMF-SERIES DEDICATED FORENDS



♠ BATTERY INFORMATION & WARNING

Before replacing batteries, read the enclosed BATTERY INFORMATION/ WARNING insert in your original packaging. For additional battery safety, handling, and product information, visit www.surefire.com/batteries.

MAINTENANCE

Use a clean, dry cloth to wipe off body and window. Periodically clean and lubricate threads and 0-rings using a thin coat of non-migrating, silicon-based lubricants. Avoid using petroleum-based lubricants that can damage O-rings. To remove any accumulated residue from the window, blow any loose particles from window surface, and then rub window surface with a pencil eraser until residue is removed. Shake away eraser rubbings, then wipe window clean with a soft, dry cloth. For additional tips on maintaining your SureFire illumination tool, visit www.surefire.com/fags-maintenance.

ACCESSORIES

SureFire makes a full line of accessories for most of its illumination tools. For a complete listing, visit www.surefire.com/accessories.

THE SUREFIRE NO-HASSLE GUARANTEE

We'll do what it takes to keep your SureFire gear running smoothly. SureFire warrants that if you — our customer — purchase one of our products, and we determine that it is defective in material and/or workmanship during your lifetime, we will repair or replace it - no hassle!

Our warranty does not cover consumables or normal wear-and-tear — things like batteries draining, headbands and headpads wearing out, ink cartridges running out, and switches wearing out - or damage resulting from abuse, alterations, unauthorized repairs, or use contrary to SureFire's user manuals.

Should you need a replacement product, SureFire reserves the right to replace an obsolete product with a current production. like model. In the event that any issue with a SureFire product is not covered under this warranty SureFire can arrange to have the product repaired for a reasonable fee.

STANDARD DISCLAIMER

Except as specified above or prohibited by applicable law: all express or implied conditions and warranties, including, without limitation, any implied warranty or condition of merchantability or fitness for a particular purpose, or accuracy of any informational content, are hereby excluded and disclaimed by SureFire; and in no event will SureFire be liable for any special, direct, indirect, consequential, incidental or punitive damages howsoever arising and regardless of the theory of liability, even if advised of the possibility of such damages. Products, prices, availability, specifications, and offers are subject to change or cancellation at any time without notice.

WARRANTY CLAIMS

For claims, contact Customer Service at 714-545-9444 to obtain a Return Merchandise Authorization number (RMA#). Then package the unit carefully and send to (no CODs):

> SureFire, LLC. Repairs Department, RMA# 17680 Newhope Street, Suite B Fountain Valley, CA 92708


SureFire will pay any reasonable shipping costs to return the unit to you.



Revision C 8-2019 71-01-1080 328LMF-B, 628LMF-B










LMF-SERIES DEDICATED FORENDS

HIGH-OUTPUT LED WEAPONLIGHT FOR HK MP5, HK53 & HK94 628I MF-R

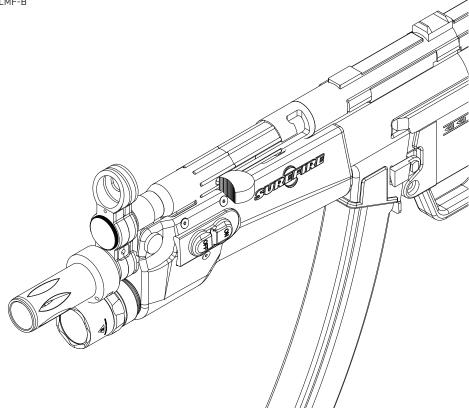

		328LMF-B	628LMF-B
SPECIFICATIONS	OUTPUT	500 lumens	600 lumens
	RUNTIME	1.0 hour	2.25 hours
	PEAK BEAM INTENSITY	7,600 candela	7,000 candela
	DISTANCE	175 meters	165 meters
	CONSTRUCTION	Nitrolon® polymer/Aluminum	
	FINISH	Mil-Spec Hard Anodized	
	WEIGHT (w/batteries)	9.6 oz (272.2 g)	17.6 oz (499 g)
5	LENGTH	8.14 in (20.6 cm)	9.48 in (24 cm)
	BEZEL DIAMETER	1.125 in (2.9 cm)	1.125 in (2.9 cm)
	BATTERIES	One 123A lithium (incl.)	Two 123A lithium (incl.)
	SWITCHING	Pressure pad + constant-on rocker	

All performance claims tested to ANSI/NEMA FL1-2009 Standard.



LM-SERIES DEDICATED FORENDS



A

BEFORE INITIAL USE, REMOVE BATTERY INSULATOR

KIT CONTENTS

- LED/TIR Head
- 123A Lithium Batteries (one or two depending on model)
- · Forend WeaponLight Housing
- User Manual

INSTALLATION

A WARNING

ALWAYS confirm weapon is unloaded and on SAFE before attempting installation.

- 1. Consult firearm's owner's manual for proper safety procedures, then confirm that weapon is unloaded and the safety is on.
- 2. Remove factory forend.
- Install the SureFire dedicated forend WeaponLight in its
 place by reversing the factory forend removal process. Refer to
 weapon's owner's manual as needed.

BATTERY INSTALLATION/REPLACEMENT

A WARNING

Use of substandard batteries can cause injury or property damage. Visit www.surefire.com/batterysafety.

- 1. Remove LED head and insert batteries into the body with positive terminals oriented toward bezel.
- 2. Tighten LED head hand tight.

WEAPONLIGHT OPERATION

- For momentary-on operation: Apply fingertip pressure to pressure-pad switch to activate light; release pressure to turn off.
- For constant-on operation: Press "ON" button of rocker switch until it clicks and light goes on; press "OFF" button of switch to turn light off.

